

LED Reflector Lamps SMART LIGHT



Light is everything

HARMONY LIGHTS UP THE WORLD

Should you have any comments or queries, please contact our sales team on;


Hong Kong Tel.: (852) 2521 3909 or Fax: (852) 2485 2188

Shenzhen Tel.: (86) 755 8369 4737 or Fax: (86) 755 8369 4741

WWW.harmony-lighting.com sales@harmony-lighting.com

Note: Products must be installed by a qualified electrician.



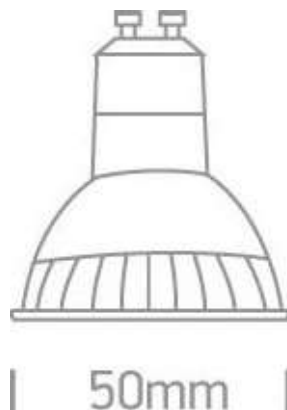

53mm

50mm



Scan the QR code to download

HMB-00010

| | |
|----------------------------------|-------------------------------|
| Description: | Classic 5.5W HO Dimmable RA90 |
| Cap - Base: | GU10 |
| Rated Wattage: | 5.5W |
| Input Voltage: | 220-240 Vac |
| Operating Frequency: | 50-60Hz |
| Luminous Flux: | 380lm/420lm |
| Lifetime (hours): | 15,000 hrs |
| Switching Cycles: | 50,000 |
| Smart Time (0%-100%): | < 0.5s |
| Power Factor: | 0.8 |
| Working Temperature: | -20°C ~ 35°C |
| Color Temperature: | 2700K / 3000K / 4000K |
| Color Rendering Index: | Ra90 R9>50 |
| Lamp Efficacy: | up to 76lm/W |
| Lumen Maintenance Factor: | 70% |
| Beam Angle: | 38D/60D |
| Dimming Type: | Phase Cut Dimming |
| Equivalence to Halogen: | 50W |
| CNT: | 100pcs/carton |
| Carton: | 54 x 27.5 x 15.5cm |
| CBM/CTN: | CBM/CTN: 0.0230175 |

HMB-00011

| | |
|----------------------------------|-----------------------------|
| Description: | Glowlite 5.5W Dimmable RA90 |
| Cap - Base: | GU10 |
| Rated Wattage: | 5.5W |
| Input Voltage: | 220-240 Vac |
| Operating Frequency: | 50-60Hz |
| Luminous Flux: | 345lm |
| Lifetime (hours): | 15,000 hrs |
| Switching Cycles: | 50,000 |
| Smart Time (0%-100%): | < 0.5s |
| Power Factor: | 0.7 |
| Working Temperature: | -20°C ~ 35°C |
| Color Temperature: | 3000K - 2200K |
| Color Rendering Index: | Ra90 R9>50 |
| Lamp Efficacy: | up to 65lm/W |
| Lumen Maintenance Factor: | 70% |
| Beam Angle: | 38D/60D |
| Dimming Type: | Phase Cut Dimming |
| Equivalence to Halogen: | 50W |
| CNT: | 100pcs/carton |
| Carton: | 54 x 27.5 x 15.5cm |
| CBM/CTN: | CBM/CTN: 0.0230175 |

HMB-00012

| | |
|----------------------------------|----------------------------------|
| Description: | Dual-Mode Smart 5W Wireless RA90 |
| Cap - Base: | GU10 |
| Rated Wattage: | 5W |
| Input Voltage: | 100-240 Vac |
| Operating Frequency: | 50-60Hz |
| Luminous Flux: | 365lm |
| Lifetime (hours): | 15,000 hrs |
| Switching Cycles: | 50,000 |
| Smart Time (0%-100%): | < 0.5s |
| Power Factor: | 0.7 |
| Working Temperature: | -20°C ~ 35°C |
| Color Temperature: | 6500K - 2500K |
| Color Rendering Index: | 90 |
| Lamp Efficacy: | up to 73lm/W |
| Lumen Maintenance Factor: | 70% |
| Beam Angle: | 38D/60D |
| Dimming Type: | Phase Cut Dimming |
| Equivalence to Halogen: | 50W |
| CNT: | 100pcs/carton |
| Carton: | 54 x 27.5 x 15.5cm |
| CBM/CTN: | CBM/CTN: 0.0230175 |



SMART LIGHT

